

REV.	DATE	DESCRIPTION
01	Apr. 29, '19	1st RELEASE


NOTES

MATERIAL
SEE DRAWING
STANDARD DATA
RATING CURRENT: 2.0A

ELECTRICAL
INSULATOR RESISTANCE: 1000M ohms MIN. @ 500VDC
WITHSTANDING VOLTAGE: 100VAC / MINUTE
CONTACT RESISTANCE: 30m ohms


MECHANICAL
MATING FORCE: 35N(3.57kgf) MAX.
UNMATING FORCE (WITHOUT LOCK): 8N(0.81kgf) MIN.
DURABILITY: 10000 CYCLES MIN.
CONTACT RETENTION FORCE: 2.1N(0.21kgf) MIN.


UNSPECIFIED TOLERANCE: .XX ±0.30
.X ±0.50

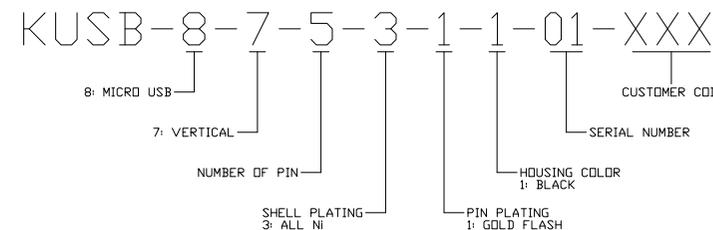

PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
SHELL	1	STAINLESS	50u" NICKEL
CONTACT	5	COPPER ALLOY	GOLD FLASH, 50u" NICKEL
HOUSING	1	SYNTHETIC RESIN	BLACK
CAP	1	SYNTHETIC RESIN	BLACK

PART NO		KUSB-8-7-5-3-1-1-01-XXX		
TITLE	MICRO USB, VERTICAL, 5 PIN			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Apr. 29, '19	1 of 3

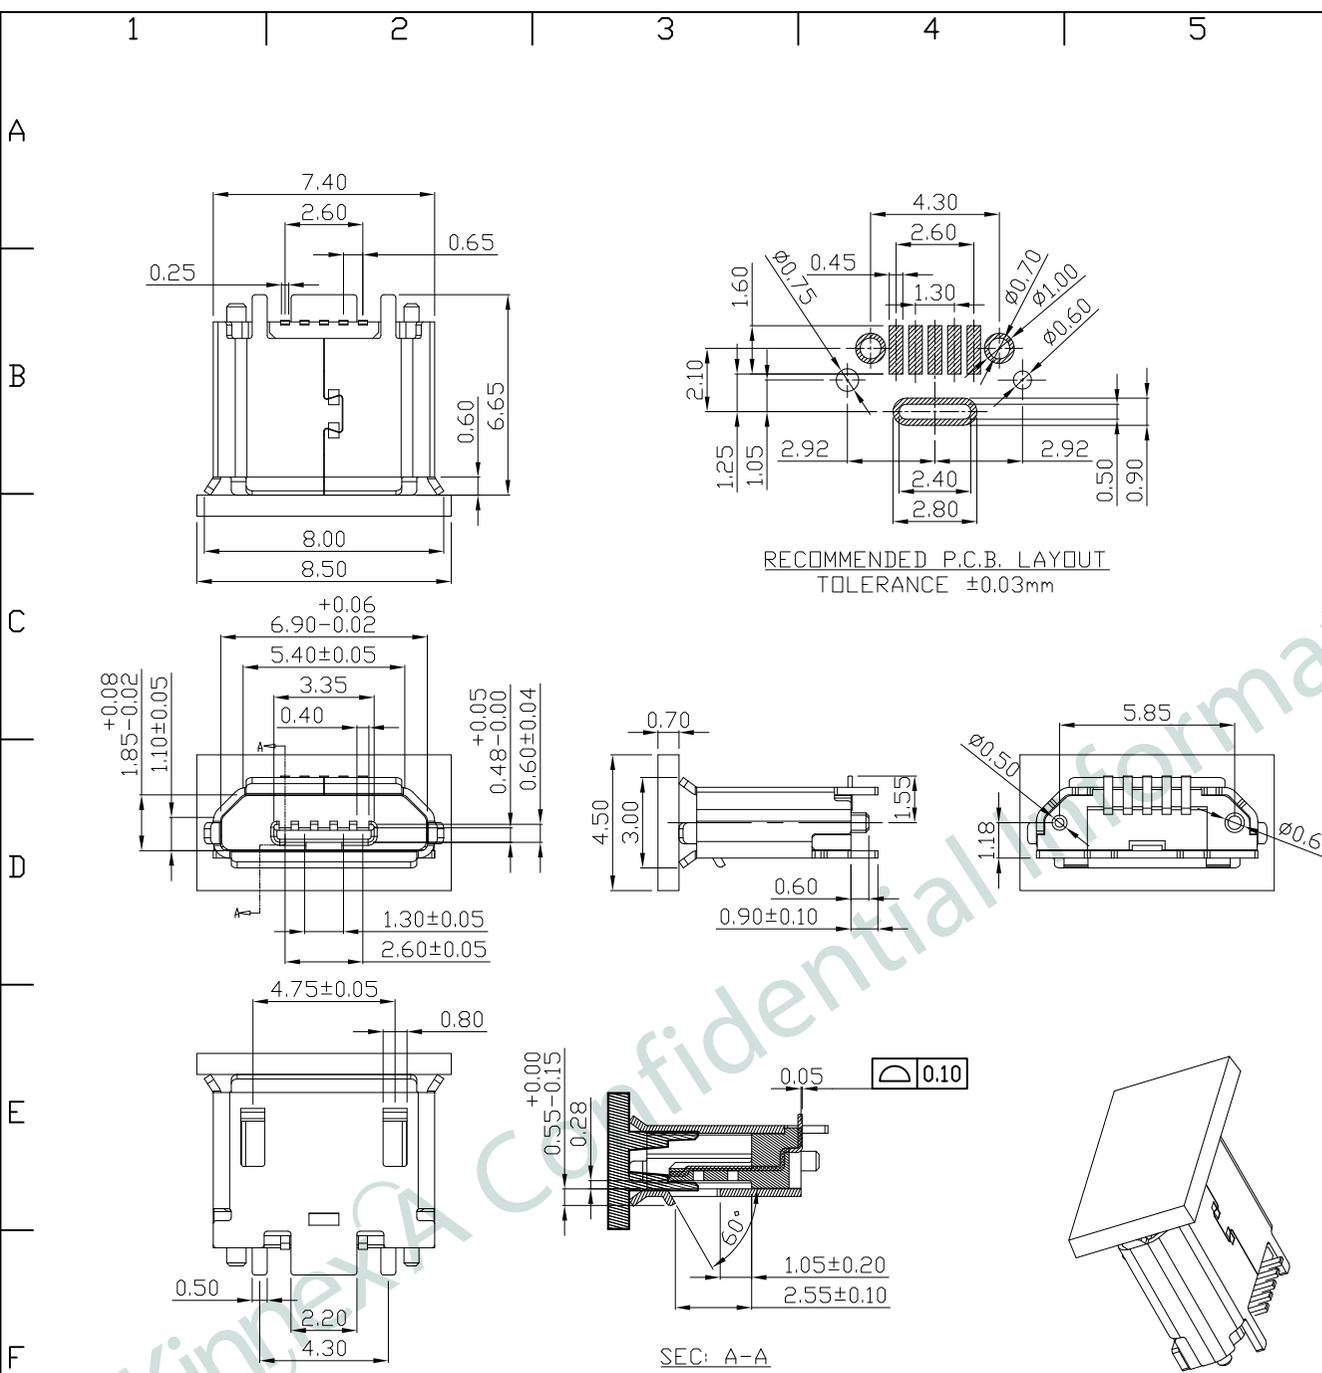


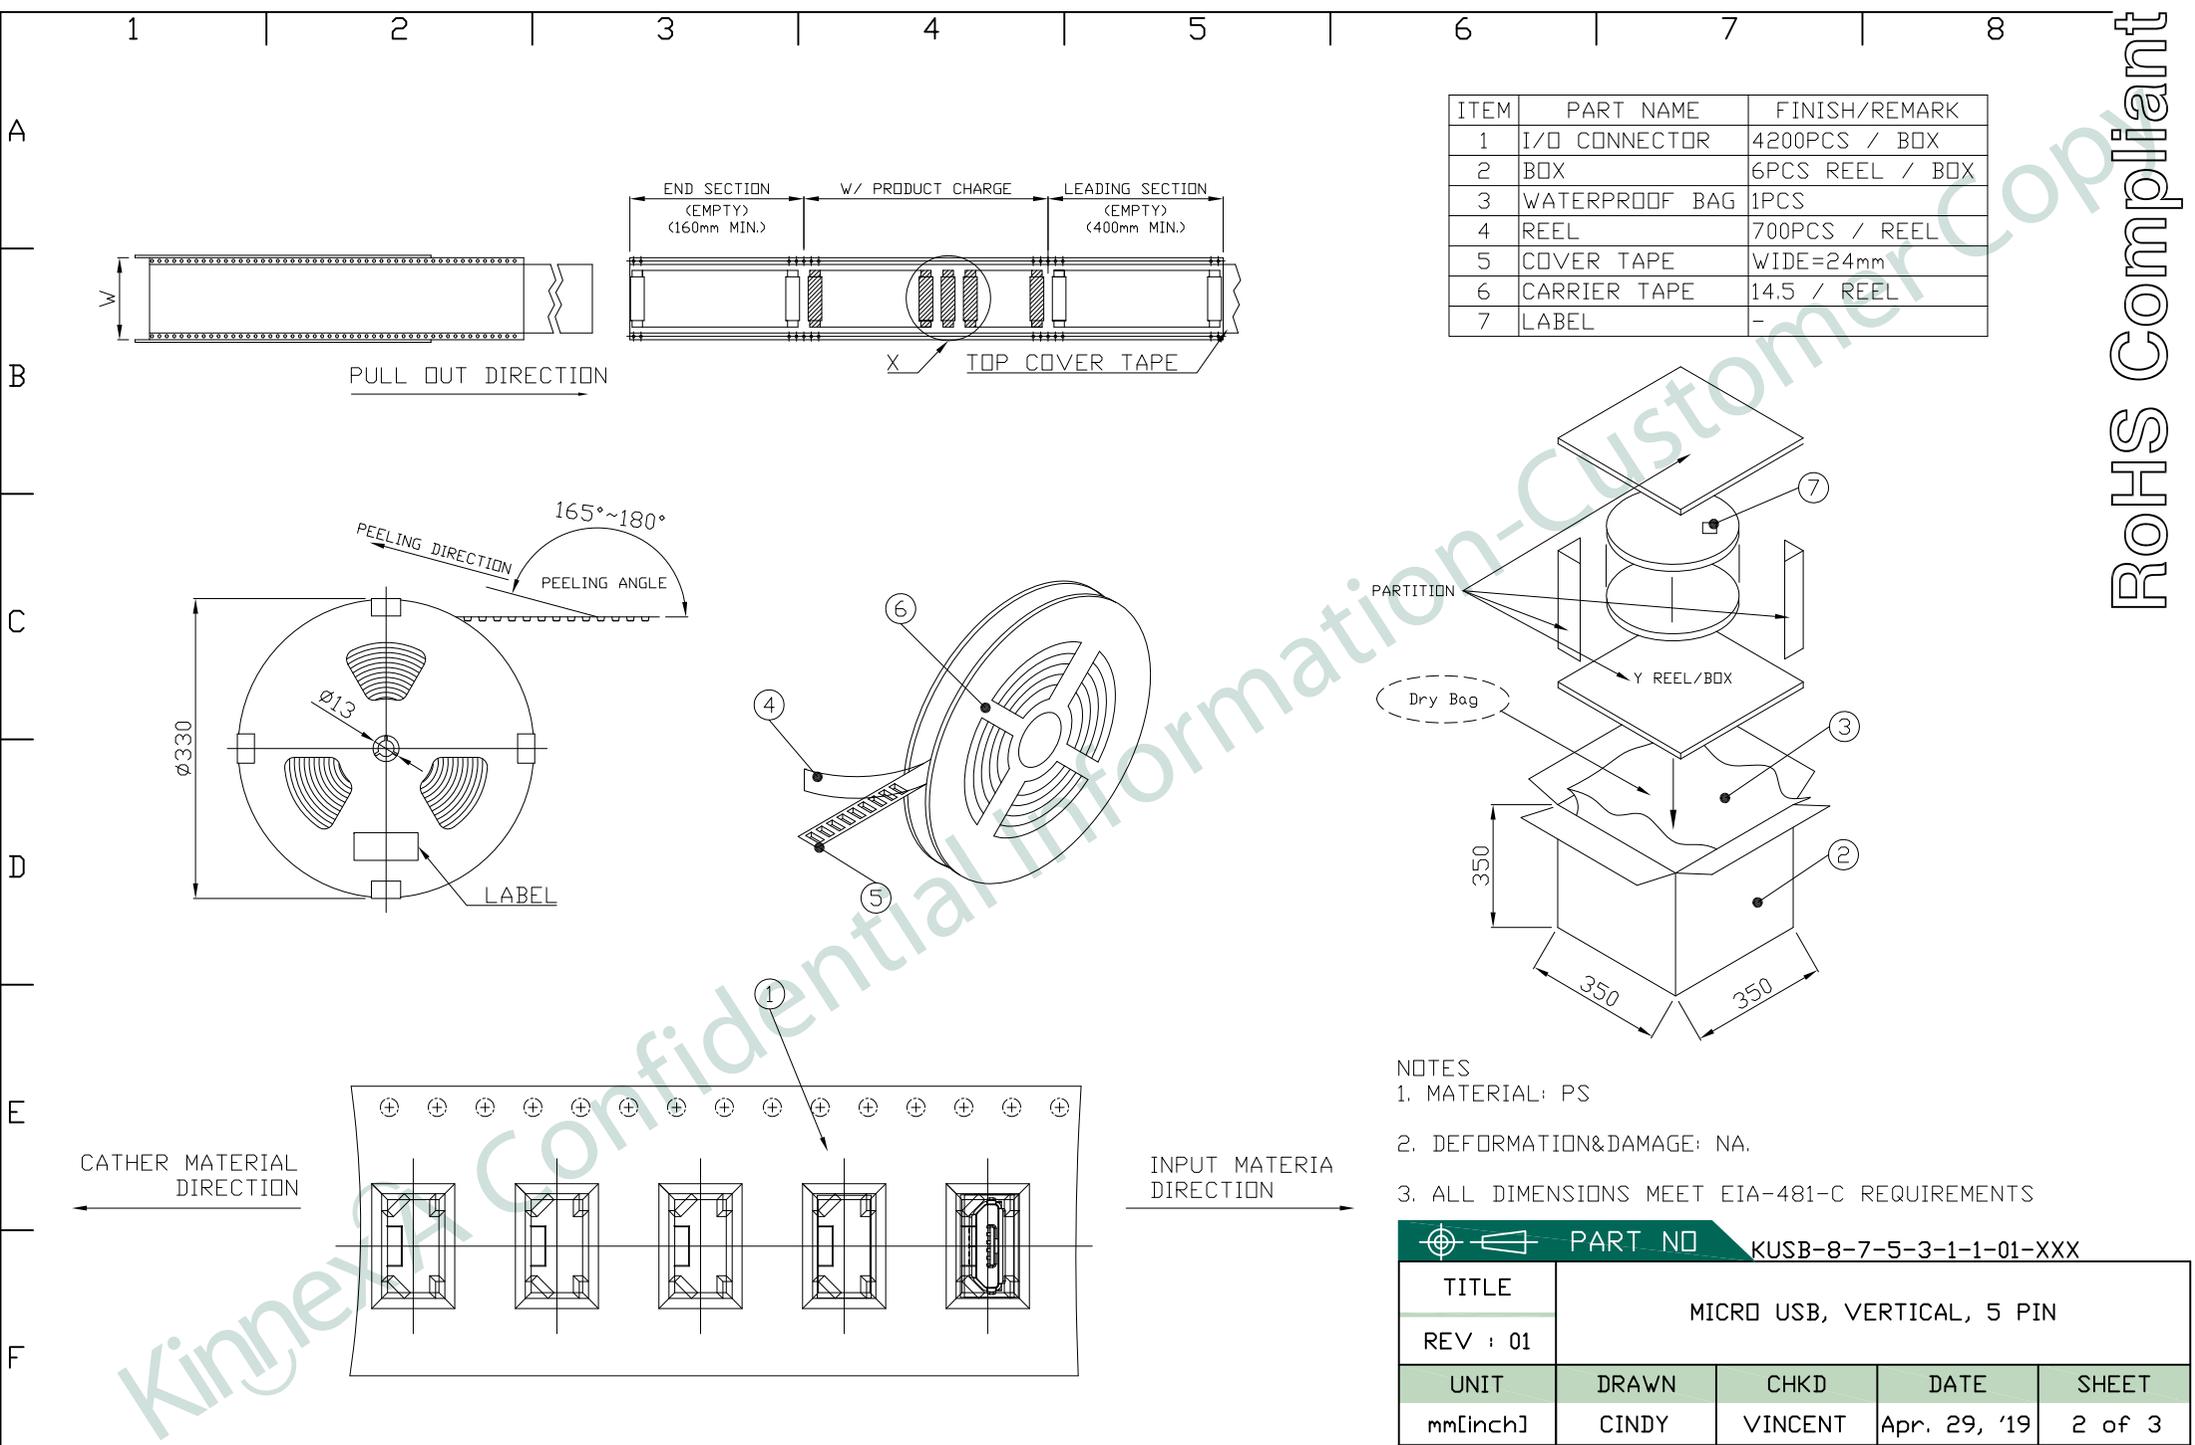

ITEM	PART NAME	FINISH/REMARK
1	I/O CONNECTOR	4200PCS / BOX
2	BOX	6PCS REEL / BOX
3	WATERPROOF BAG	1PCS
4	REEL	700PCS / REEL
5	COVER TAPE	WIDE=24mm
6	CARRIER TAPE	14.5 / REEL
7	LABEL	-

- NOTES
1. MATERIAL: PS
 2. DEFORMATION&DAMAGE: NA.
 3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS

PART NO KUSB-8-7-5-3-1-1-01-XXX				
TITLE		MICRO USB, VERTICAL, 5 PIN		
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Apr. 29, '19	2 of 3

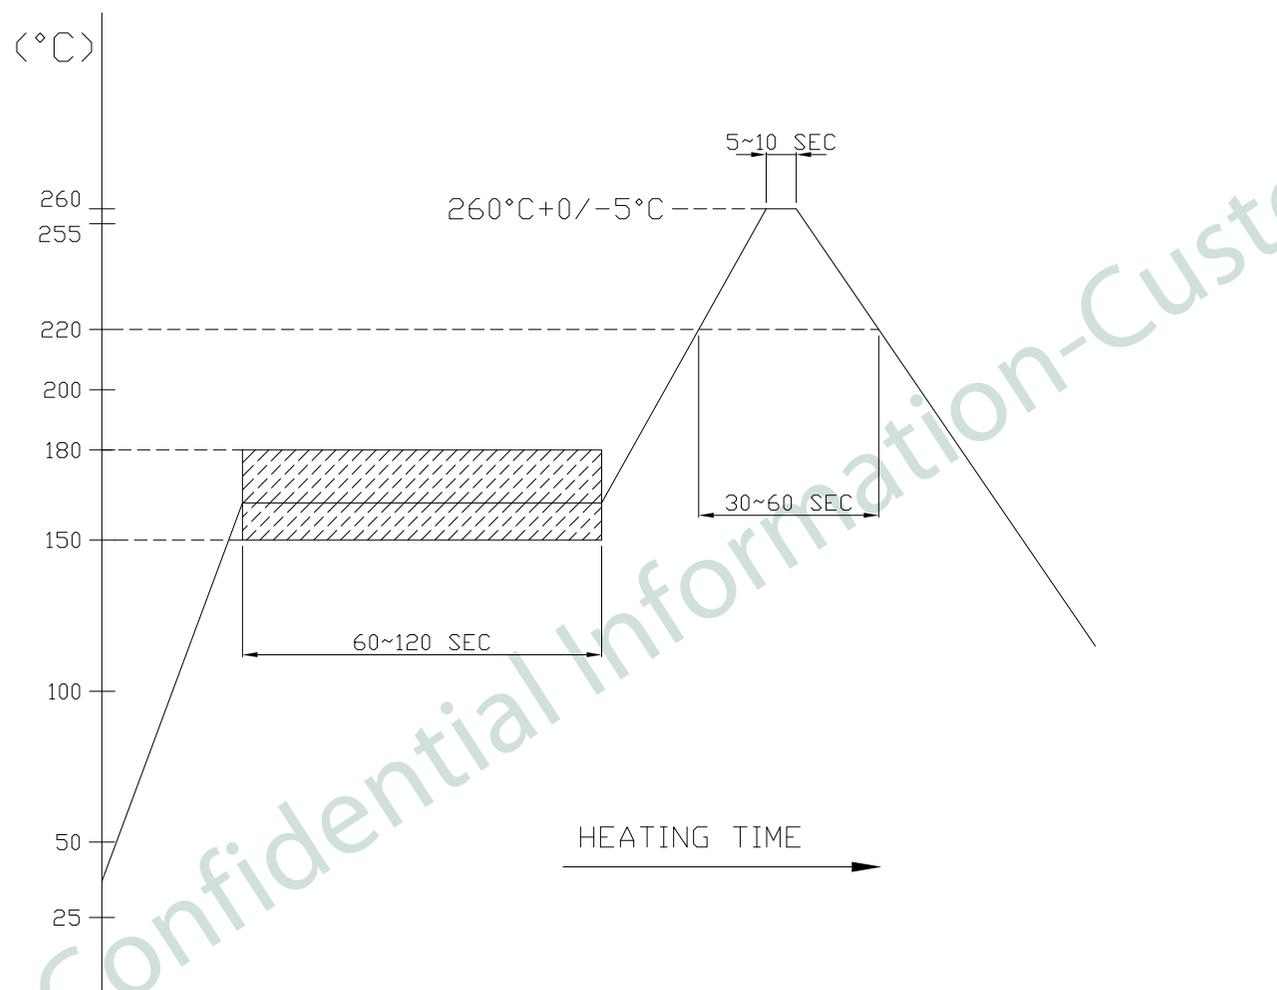

 PART NO		KUSB-8-7-5-3-1-1-01-XXX		
TITLE	MICRO USB, VERTICAL, 5 PIN			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Apr. 29, '19	3 of 3