

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	8 AWG	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	
Wire Strip Length	3/4 in.	
Stud Size	3/8 in.	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	
UL Temperature Rating	90°C	
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	RED	
Panduit Die Index No. on Barrel	P21	
Alternate Industry Die Index No. () on Barrel	N/A	





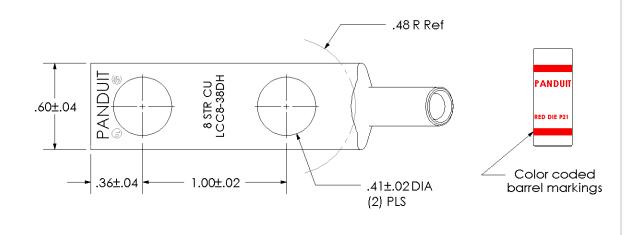

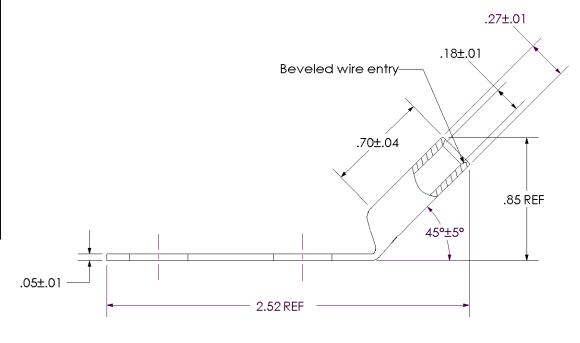

Wire Connector

00 8/02 SAB DRL RELEASED 10334 Copper Lug - Two-h	REV	SCALE DRAWING NO / CAD FILE LC	PTION ECN	DESCRIF	СНК	BY	DATE	REV
	00	Copper Lug - Two-Hole, Long Barrel, 45° A	SED 10334	RELEAS	DRL	SAB	8/02	00
		LCC8-38DH-L						
		CORP. TINLEY						

Y PARK, ILLINOIS

Angle Tongue

_CC8-38DH-CUST